

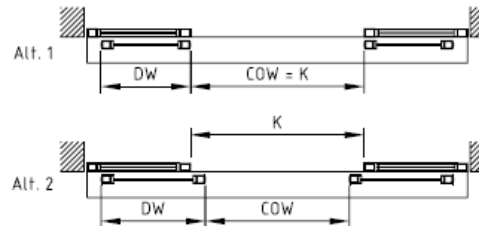
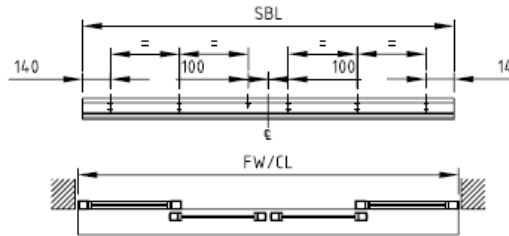




RTJ SOLUTIONS LIMITED
The Automatic Choice

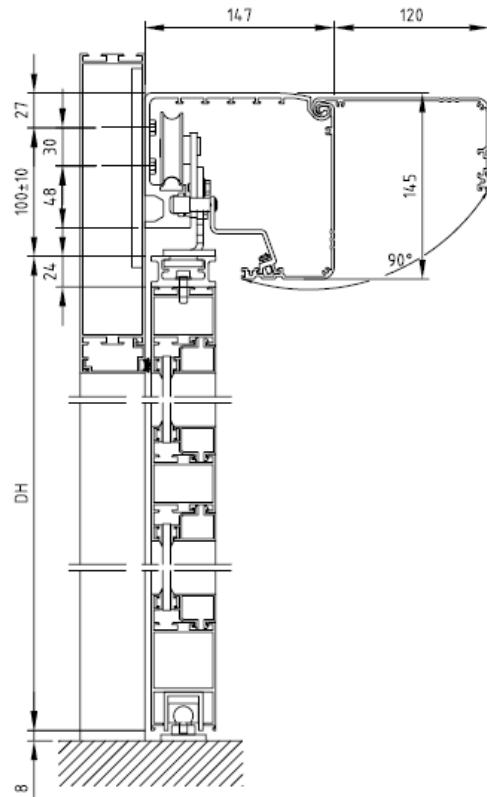

- FW= Frame width *Max. 5884*
- FH= Frame height *Max. 3000*
- COH= Clear opening height
- COW = Clear opening width
Min. 900, Max. 2867
- CL = Cover length incl end plates
Min. 1960, Max. 5884
- DH = Door leaf height
- SBL = Support beam length
- DW= Door width (If door adaptor state DW)
- K= Clear opening width, fixed screens

State when ordering

- Alt. 1
- Alt. 2
- FW/CL=.....mm
- FH=.....mm
- COH=.....mm
- COW=.....mm
- DW=.....mm
- See 1000166

Surface treatment

- Silver anodized
- Special anodized.....
- Powder coated
- Colour

Customer: _____

EntreMatic ref: _____

Door id: _____

Date: _____

Project No: _____

Sign: _____

Sliding door operator
EMSL - 2



F

833081